

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
20 January 2005 (20.01.2005)


PCT

(10) International Publication Number  
**WO 2005/004691 A1**

- (51) International Patent Classification<sup>7</sup>: **A47K 11/00**
- (21) International Application Number:  
PCT/KR2004/001056
- (22) International Filing Date: 7 May 2004 (07.05.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
10-2003-0046940 10 July 2003 (10.07.2003) KR
- (71) Applicant (for all designated States except US): **JIN-SUNG MOBILE CO. LTD.** [KR/KR]; 212-1 Maesan-ri, Opo-eup, Gwangju-si, Gyeonggi-do 464-893 (KR).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **YANG, Byung Joon** [KR/KR]; #602-411 Geumhwa Maeul Jugong Greenvil, 480 Sanggal-ri, Giheung-eup, Yongin-si, Gyeonggi-do 449-958 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: POTABLE LAVATORY

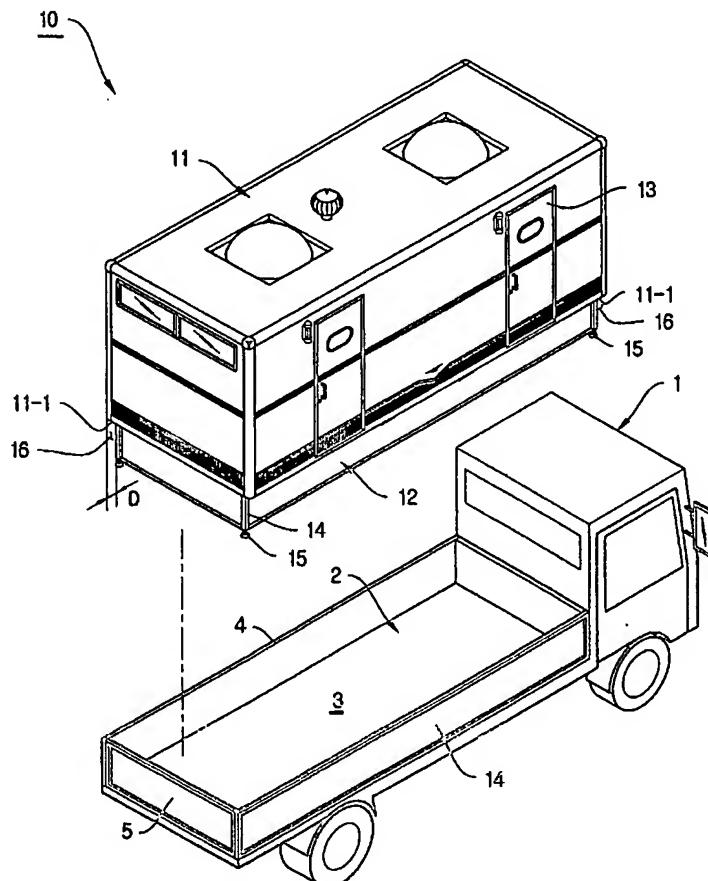

(57) Abstract: A portable lavatory, which is easily loaded into a freight box of a truck and is maintained in a stable loaded state in the freight box during transportation, is disclosed. In the portable lavatory (10), the capacities of both a fresh water tank (20) and a foul water tank (30) of a tank unit (12) are altered in inverse proportion to each other. The tank unit (12), integrated with a lower end of a lavatory facility unit (11), has a width and length shorter than those of the lavatory facility unit, thus being stepped inward from the lower end of the lavatory facility unit. The fresh water tank (20) and the foul water tank (30) are assembled with each other at flanged open ends thereof into a single structure, with a variable tank (40) provided in a junction part between the two tanks.

WO 2005/004691 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*